


ULTRA HIGH PRESSURE

COMMAND

PRODUCT SPECIFICATION




PRODUCT SPECIFICATIONS

	10 GPM GAS	20 GPM GAS	20 GPM DIESEL
Flow	10 GPM (38 LPM)	20 GPM (76 LPM)	20 GPM (76 LPM)
Pump Pressure	1450 PSI (100 bar)	1450 PSI (100 bar)	1450 PSI (100 bar)
Nozzle Pressure	1250 PSI (86 bar)	1250 PSI (86 bar)	1250 PSI (86 bar)
Weight (pump)	250 lbs (** kg)	300 lbs (** kg)	400 lbs (** kg)
Height	40 in.(102 cm)	40 in.(102 cm)	40 in.(102 cm)
Width	48 in. (122 cm)	48 in. (122 cm)	48 in. (122 cm)
Depth	37 in. (94 cm)	37 in. (94 cm)	37 in. (94 cm)

Nozzle Options



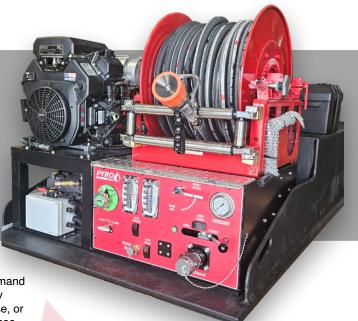


PRODUCT FEATURES


- Water and Foam Skid Unit
- ✓ Water and Foam Gauges
- Auto Water Tender
- Front Panel Foam Fil
- Pressure Gauge
- 1.5" Front Panel Water Inlet
- 0% 6% Foam Proportione
- 200' 3/4" UHP Hose
- Elkhart Chief UHP Nozzle
- ✓ Venturi Foam System
- 1 Year Limited Warranty
- Auto / Manual Modes
- On Board Fuel Cell and Battery
- Kohler 26 HP Fuel Injected Gas Engine
- ✓ Kubota DH 902 Diesel Engine





P: (800) 277-3279 E: sales@esdfire.com W: www.esdfire.com














TK-PUMP CHECK VALVE - CAN BE RELOCATED TO TANK

